



ROMAN TUB SET (TRIM ONLY)


Features


- Over 30 finishes including 15 PVD finishes

- Solid brass construction Max flow rate: 16 gpm (60.6 L/min) Requires Rough Valve: 08-75-99 (sold separately)



- Codes/Standards Applicable Meets or exceeds the following at date of manufacture: ASME A112.18.2-2011/CSA B125.2-11
- ADA



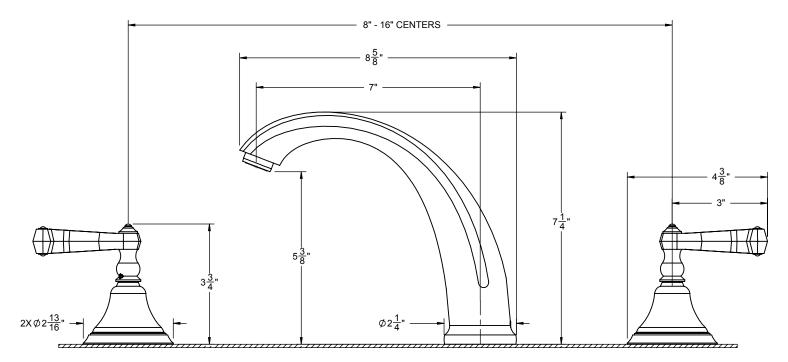

| THROUGH-HOLE SPECIFICATIONS | | | |
|-----------------------------|--------|----------|--|
| | RECOME | NDED MAX | |
| SPOUT: Ø1- VALVE: Ø1-1 | | | |

ALL DIMENSIONS SHOWN TO NEAREST 1/16"