KOHLER_®

Features

- Bask[®] heated surface creates spa-like relaxation with soothing warmth on your back and neck.
- Three heat settings allow you to customize the surface temperature.
- Comfort Depth[®] design offers a convenient 19-inch step-over height while retaining the same depth as a standard 21-inch bath.
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface.
- Left-hand drain.
- Coordinates with other products in the Archer collection.

Material

Acrylic

Installation

Three-wall alcove.

Additional Hydrotherapy Options

- Soaking Bath K-1946-L
- Soaking Bath + Bask heated surface K-1946-LW
- BubbleMassage air bath K-1947-GLF
- BubbleMassage air bath + Bask heated surface K-1947-GLW
- VibrAcoustic K-1947-VBL
- VibrAcoustic + Bask heated surface K-1947-VBLW
- Whirlpool K-1947-L
- Whirlpool + heater K-1947-LH
- Whirlpool + Bask heated surface K-1947-LW
- Whirlpool + BubbleMassage air bath K-1947-XHGL

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-24916 Wireless Music Kit



ADA

Codes/Standards

CSA B45.5/IAPMO Z124 UL 1795 ADA ICC/ANSI A117.1

KOHLER[®] Plastic Baths and Receptors Lifetime Limited Warranty KOHLER[®] Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

- 0 White 96 Biscuit 47 Almond NY Dune 95 Ice™ Grey
 - G9 Sandbar
 - K4 Cashmere
 - 58 Thunder™ Grey
 - 7 Black Black™




Archer® 5' Bath K-1946-LW



Archer® 5' Bath K-1946-LW

No change in measurements if connected with drain illustrated. (K-7272)

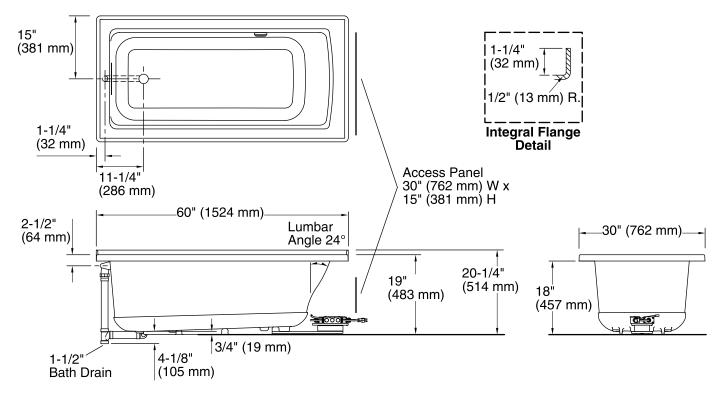

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Heated Surface: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Left
Basin area, bottom:	45-1/8" x 19-11/16" (1146 mm x 500 mm)
Basin area, top:	52-1/8" x 22-1/16" (1324 mm x 560 mm)
Weight:	68 lbs (30.8 kg)
Minimum floor load:	45.5 lbs/ft² (222.2 kg/m²)
Water depth:	15-1/8" (384 mm)
Water capacity:	57 gal (215.8 L)
Electrical component rating:	Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W
Minimum flat for door:	2" (51 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

ADA compliant when installed to the specific requirements of these regulations.

