



Model ID	Package Code	Description (define configuration referencing control side)
----------	--------------	---

SH3P-3636 (Std or ABF)	/ BP1-R (right wall)	36" x 36", 3-piece, center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.50" dia. stainless steel 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
SH3P-3636 (Std or ABF)	/ BP1-L (left wall)	

**Powder Coated Bar Packages (1.25-inch dia.)**

SH3P-3636 (Std or ABF)	/ BP1-R WHT (right wall)	36" x 36", 3-piece, center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.25" dia. white powder coated 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
SH3P-3636 (Std or ABF)	/ BP1-L WHT (left wall)	
SH3P-3636 (Std or ABF)	/ BP1-R OFW (right wall)	36" x 36", 3-piece, center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.25" dia. off-white powder coated 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
SH3P-3636 (Std or ABF)	/ BP1-L OFW (left wall)	
SH3P-3636 (Std or ABF)	/ BP1-R SNK (right wall)	36" x 36", 3-piece, center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.25" dia. nickel finish 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
SH3P-3636 (Std or ABF)	/ BP1-L SNK (left wall)	

**Package Notes:**

1. Model available without listed package.
2. For 3-bar package, adding a vertical bar on control wall, see ActivLife "BP2" package code.
3. For single horizontal bar package, see ActivLife "BP5" package code.
4. For REINFORCEMENT ONLY for horizontal bars (HUD/FHA-Fair Housing), see ActivLife "FH" package code.
5. For expanded reinforcement package options, (with or without listed package components), see ActivLife "3SM" and "3SF" package codes.

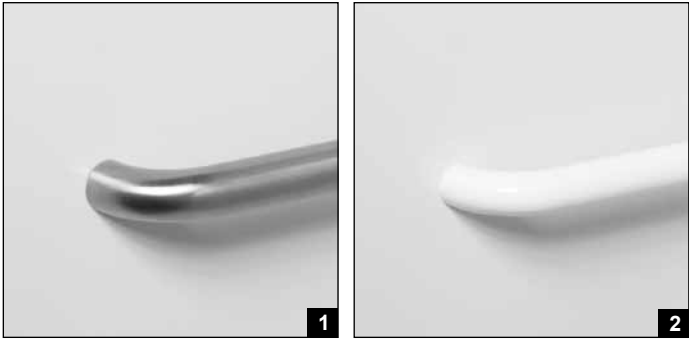
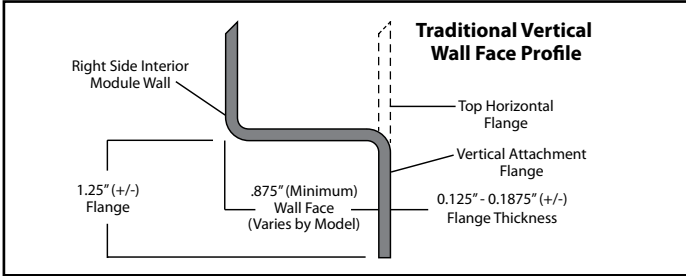


Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)