


W Track System - Surface Mount



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Heavy duty architectural grade track with two independently controllable circuits. Stem or cable suspensions available.

FEATURES

- Power per Circuit: 1920W max (120V) , 4432W max (277V)
- Operating Current: Each circuit is rated 20A (2 x 20A = 40A max)
- Extruded aluminum construction
- UL & CUL listed
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Materials: Solid copper alloy bus bars in an extruded aluminum with a rectangular cross-sectional area of 4.2 mm²

Electrical: Electric feed capability through all jointers/feeders (except Power Connector and Flexible Connector) using standard 1/2 inch knock-outs

Mounting: Fixtures may be installed or removed anywhere along the track. Minimum fixture spacing is 1 foot. Track fixture has safety interlocks when installed/removed. Polarization is guaranteed throughout the system

Finish: Available in black powder coat (**BK**), white powder coat (**WT**), or platinum anodized (**PT**) finishes

Standards: UL & CUL listed

ORDER NUMBER

| Model | Length | Finish |
|-----------------|---------------|--------------------|
| WT 120V | 4 4' | BK Black |
| WHT 277V | 8 8' | PT Platinum |
| | 12 12' | WT White |

Each section includes two matching end caps.



Example: **WHT4-PT**












wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585



Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050









Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122








Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

W Track System - Surface Mount

| Accessories | Model | Volt | Finish | Description |
|---|-----------------------------|--------------|-------------------------------------|---|
| Live End Connector – Left Polarity  | WEDL WHEDL | 120V 277V | BK PT WT | Direct wiring through ceiling. Polarity on left side of track. |
| Live End Connector – Right Polarity  | WEDR WHEDR | 120V 277V | BK PT WT | Direct wiring through ceiling. Polarity on right side of track. |
| "I" Connector  | WPC WHPC | 120V 277V | BK PT WT | Join two sections of track with electrical continuity. |
| "I" Power Connector  | WIC WHIC | 120V 277V | BK PT WT | Power entry point at the connection of two tracks. |
| Flexible Connector  | WFC WHFC | 120V 277V | BK PT WT | Transition from wall-to-wall, wall-to-ceiling, or ceiling-to-ceiling. Power feedable. |
| Canopy Plate  | CP | 120V 277V | BK PT WT | Covers a standard 4" octagonal box. |
| "L" Connector Left Polarity  | WLLC WHLLC | 120V 277V | BK PT WT | Join 2 track sections to make power feedable 90° left polarity turns. |
| "L" Connector Right Polarity  | WRLC WHRLC | 120V 277V | BK PT WT | Join 2 track sections to make power feedable 90° right polarity turns. |
| "T" Connector – Left  | WLTC WHLTC | 120V 277V | BK PT WT | Join 3 track sections. Power feedable. Polarity on outside edge. |
| "T" Connector – Right  | WRTC WHRTC | 120V 277V | BK PT WT | Join 3 track sections. Power feedable. Polarity on inside edge. |
| "X" Connector  | WXC WHXC | 120V 277V | BK PT WT | Join 4 track sections. Power feedable. |

| Track Current Limiter | Model | Volt | Rating | Finish | Description |
|--|-----------------------------|--------------|--|-------------------------------------|---|
| Live end - Left  | WEDL WHEDL | 120V 277V | 1A 1 Amp 2A 2.5Amp 5A 5 Amp 7A 7.5Amp 10A 10Amp 12A 12Amp | BK PT WT | Assures compliance to California Title 24 or ASHRAE 90.1 requirements |
| Live end - Right  | WEDR WHEDR | 120V 277V | | | |

| Suspension | Model | Length | Finish | Description |
|---|----------------|--|-------------------------------------|--|
| Stem Kit With Power Feed  | WMSP | 6 6" 12 12" 24 24" 36 36" 48 48" 96 96" | BK PT WT | Power feed to connect with a Live End or any Joiner/Feeder. May be field cut. |
| Flexible Power Feed  | WMFP | 48 48" 96 96" | BK PT WT | Flexible power feed to connect with a Live End or any Joiner/Feeder. Recommended for use with Cable Suspensions. May be field cut. |
| Pendant Stem Kit  | WMT-X | 6 6" 12 12" 24 24" 36 36" 48 48" 96 96" | BK PT WT | Use to extend track from the ceiling. May be field cut. |
| T-Bar Stem Kit  | WMT-TB | | | Extend track from drop ceilings. May be field cut. |
| Sloped Ceiling Stem Kit  | WMT | XS6 6" XS12 12" XS24 24" XS36 36" XS48 48" XS96 96" | BK PT WT | Use to extend track from a sloped ceiling. May be field cut. |
| Sloped Ceiling Cable Kit  | WMST | XS48 48" XS96 96" | BK PT WT | Extend track from a sloped ceiling. May be field cut. |
| Suspension Cable Kit  | WMST-X | 48 48" 96 96" | BK PT WT | Extend track from the ceiling. May be field cut. |
| T-Bar Suspension Cable Kit  | WMST-TB | | | Extend track from drop ceilings. May be field cut. |

| Suspension Accessories | Model | Finish |
|--|-------------|-------------------------------------|
| Suspension Hanger Clip  | WMT | BK PT WT |
| "I" Power Connector Suspension Mount  | WMPC | BK PT WT |
| Live End Suspension Mount  | WMED | BK PT WT |
| Power Feed Coupler Suspension Mount Use with "I" Power Connector  | WMIC | BK PT WT |
| "L" Connector Suspension Mount  | WMLC | BK PT WT |
| "T" Connector Suspension Mount  | WMTC | BK PT WT |
| "X" Connector Suspension Mount  | WMXC | BK PT WT |

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585


Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760


Straight Configuration

- A WEDR** Live end connector (right)
- B WIC** I power connector
- C WPC** I connector
- D WEC** End cap

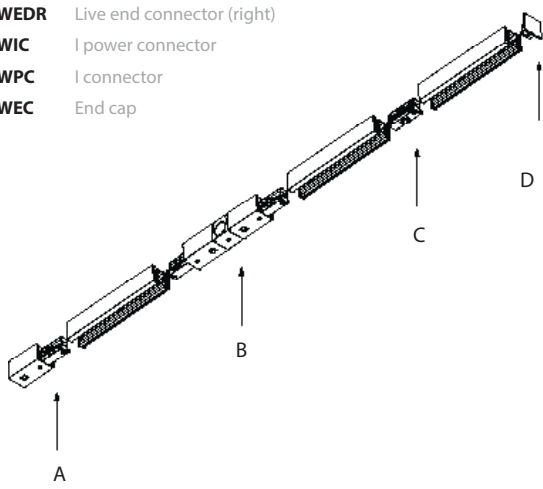


Flexible Configurations

- A WEDR** Live end connector (right)
- B WEDL** Live end connector (left)
- C WFC** Flexible connector
- D WEC** End cap

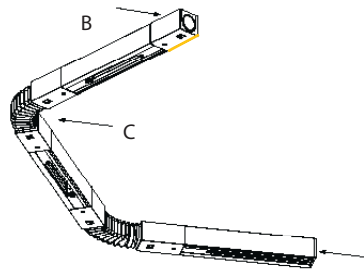

Horizontal Ceiling Mount

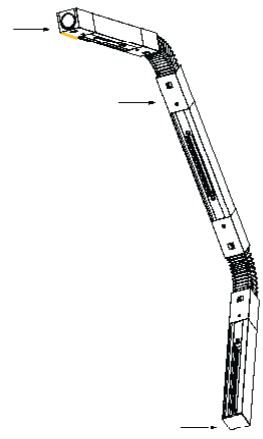


Vertical Wall-to-Ceiling Mount

Grid Configuration

- A WLLC** L Connector Left
- B WLTC** T Connector Left
- C WRTC** T Connector Right
- D WXC** X Connector


= Indicates Electrical Continuity

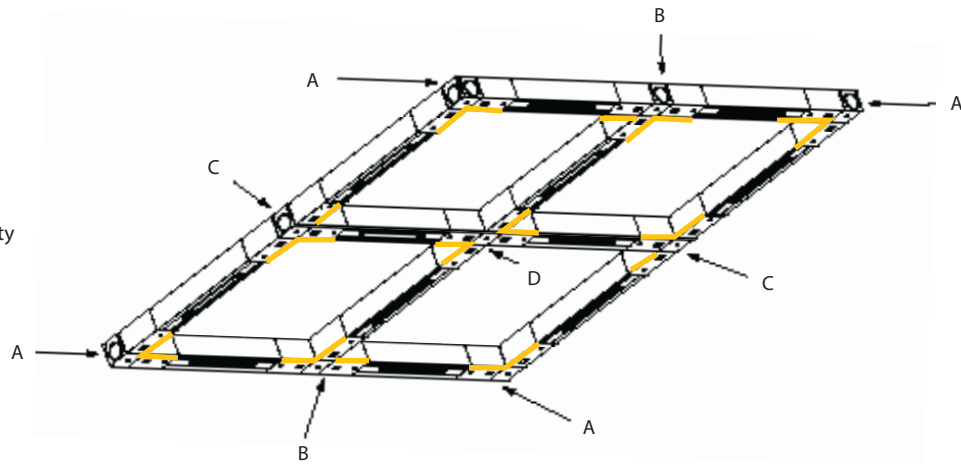

Cable Suspension Mount

- A WMFP** Flexible Stem kit with power feed
- B WMED** Live end suspension mount
- C WEDL** Live end connector (left)
- D WMST-X** Cable suspension kit
- E WMT** Suspension hanger clip
- F WMST-TB** T bar cable suspension kit
- G WMST-XS** Sloped ceiling cable kit
- H WMLC** L connector suspension mount
- I WLLC** L connector left
- J WEC** End cap

Use one support for every 4 feet

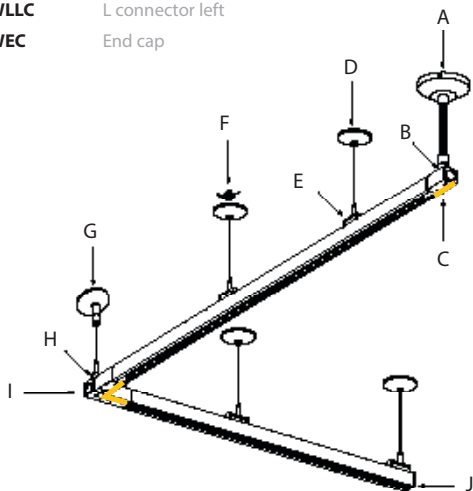

Stem Suspension Mount

- A WMSP** Stem kit with power feed
- B WMED** Live end suspension mount
- C WEDR** Live end connector (right)
- D WMT-XS** Sloped ceiling stem kit
- E WMT** Suspension hanger clip
- F WMT-TB** T bar stem kit
- G WMT-X** Stem kit
- H WMLC** L connector suspension mount
- I WLLC** L connector left
- J WEC** End cap

