Engineering Specification

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

LEAD FREE*

Series LFTWH

Tankless Water Heater Valves

Sizes: 3/4" & 1"

Series LFTWH tankless water heater valves are designed to simplify the installation, maintenance and operation of tankless water heaters. The LFTHW features Lead Free* construction to comply with Lead Free* installation requirements.

Features

- Lead Free* copper silicon alloy body
- FPT unions for connection to water heater (all models)
- FPT unions for connection to water lines (UT models)
- Quick-Connect end connections to water lines (QT models)
- FPT connection to water lines (FT models)
- Sweat connection to water lines (FS models)
- FPT/sweat unions for connection to water lines (UTS models)
- Full-port, quarter-turn ball valve with color-coded tee handle and union
- Quarter-turn purge and drain valve with hose connection and tethered brass cap
- Optional ¾" pressure relief valve 150psi (10.3 bar)
- Optional integral spring check valve in cold water valves
- Hot and cold valves certified to NSF/ANSI 61
- Staggered connection points for ease of installation and access
- Valves are suitable for most tankless installations
- No additional adapters required
- 600 WOG rated


Materials

Body: Lead Free* copper silicon alloy body

Ball: Lead Free* brass Seats: Virgin PTFE

Standards



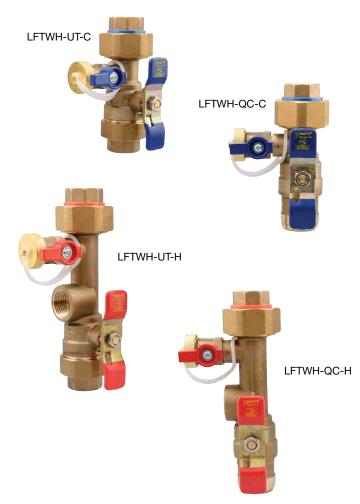

NOTICE


The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.


NOTICE

Inquire with governing authorities for local installation requirements

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.




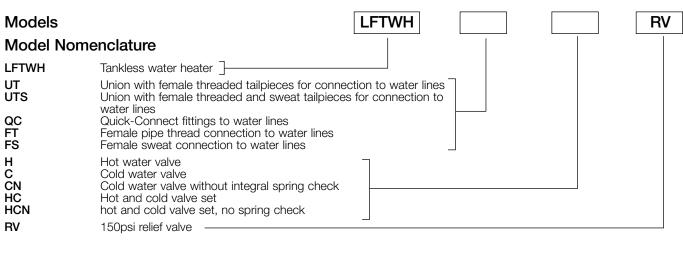


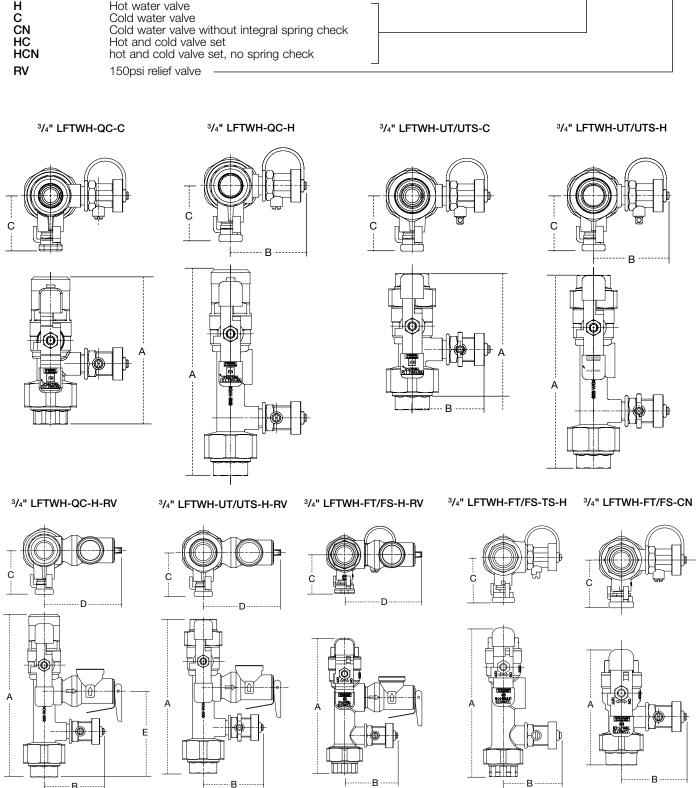



1" LFTWH-UT/UTS-CN

1" LFTWH-UT/UTS-H










1" LFTWH-UT/UTS-H-RV



Dimensions - Weights

SIZE	MODEL	CONNECTIONS			DIMENSIONS									
			А		В		С		D		E			
in.			in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.
3/4"	LFTWH-UT-C	Union x Union	4 ¹⁵ ⁄ ₁₆	125	2 ¹³ ⁄ ₁₆	71	2	51	_	-	-	-	2.2	1.0
3/4"	LFTWH-UT-H	Union x Union	6 ¹⁵ ⁄16	177	23/4	69	2	51	_	_	_	-	2.5	1.1
3/4"	LFTWH-QC-C	Quick-connect x Union	5 ⁵ ⁄ ₁₆	135	2 ¹³ / ₁₆	71	2	51	_	-	_	-	2.0	.9
3/4"	LFTWH-QC-H	Union x Quick-connect	73/8	187	23/4	69	2	51	_	_	_	-	2.4	1.1
3/4"	LFTWH-UT-H-RV	Union x Union	6 ¹⁵ ⁄16	177	23/4	69	2	51	31/2	89	37/8	99	2.5	1.1
3/4"	LFTWH-QC-H-RV	Quick-connect x Union	73//8	187	23/4	69	2	51	31/2	89	37/8	99	2.4	1.1
3/4"	LFTWH-FT/FS-CN	Union x FPT/Sweat	41/16	103	2 ½	64	17/8	47	_	_	_	-	1.9	0.9
3/4"	LFTWH-FT/FS-H	Union x FPT/Sweat	6	152	21/2	64	17/8	47	31/2	89	2 ⁷ / ₁₆	62	2.1	0.9
1"	LFTWH-UT/UTS-CN	Union x Union	53//8	137	2 5/8	66	21//8	54	_	_	_	_	3.0	1.3
1"	LFTWH-UT/UTS-H	Union x Union	7 ³ / ₁₆	183	25/8	66	21/8	53	_	_	25/8	66	3.3	1.5
1"	LFTWH-UT/UTS-H-RV	Union x Union	7 ³ ⁄ ₁₆	183	25/8	66	21//8	53	311/16	94	25/8	66	3.8	1.7



USA: T: (978) 689-6066 • F: (978) 975-8350 • Watts.com **Canada:** T: (888) 208-8927 • F: (905) 332-7068 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com