




TS-44

Features

- 4 15/16" spout wall to center
- 16 gpm (60.6 L/m) maximum flow rate
- Includes 3/4" to 1/2" bushing
- For use with StyleTherm, 3-VR or 2-VR valves
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

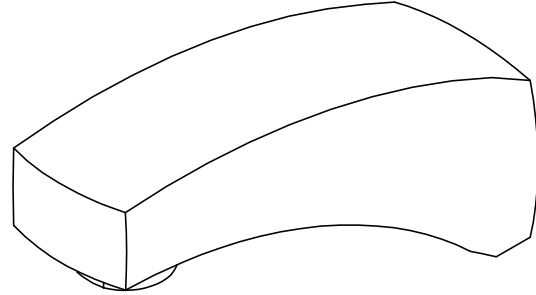

Codes/Standards Applicable

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1

